


Product data sheet

179 N XL-8 S 1/515

EAN-No. 4000896275915



– Special edition – · 515-pieces · 8 Drawers total

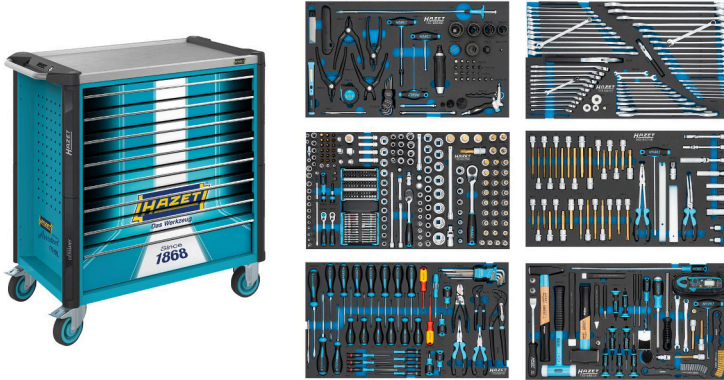

Application:

Efficient, mobile organisation of tools

- Tool trolley
- Don't be ordinary – stand out from the crowd with the tool trolley Assistant 179NXL-8S1 in a specially designed special edition. Show your enthusiasm for quality and your passion for our brand.
- 7 flat and 1 high drawers
- Complete with 515-piece tool assortment in Safety-Insert-System soft foam insert

Work surfaces

- Much larger storage and work areas in stainless steel
- Fully sealed work surface protects inside of trolley from leaking liquids
- Interfaces integrated in the work area for accessories such as laptop holders and top modules
- Stainless steel work surface
- Extra protection through high-quality plastic end caps

Body / pull-handle

- Extremely robust design thanks to double-walled construction
- Complete welded construction of the entire body for tough daily workshop use
- Optimised, yielding edge protection on all four corners with real impact protection thanks to internal damping concept
- Ergonomically optimised pull handle for better manoeuvrability
- Brushed stainless steel handle

Locking concept

- Lateral cylinder lock (replaceable) with two folding keys (adjustable, including serial number) protects the lock and key from damage
- Highly secure closing system with central locking technology for optimum protection of your property
- 2-stage locking
 - Central locking, lockable with cylinder lock and 2 folding keys
 - Mutual drawer locking for minimum tilting risk

Drawer concept

- Self-closing and reciprocal locking of the drawers prevents unwanted opening
- 100% sliding-out with ball-bearing telescopic slides
- Drawer design for optimum use of the interior
- Drawer fronts for optimised handling
- Dirt-resistant drawer coating for easy cleaning

High performance chassis

Product data sheet

179 N XL-8 S 1/515

EAN-No. 4000896275915



- Large wheels with high loading capacity, precision ball bearing and dual rounded rim in the pivot bearing, easy manoeuvrability, even with high dynamic load
- 2 swivel castors with dual brake:
 - Braked castors prevent rolling away
 - Braked swivel bearings prevent the swivel castors from turning, e.g. on inclined surfaces
- Protective ring prevents dirt and threads from getting in
- “Non-marking” castors leave no marks on the floor and enable smooth running
- Total loading capacity (dynamic): 750 kg
- Loading capacity (static): 1000 kg
- Loading capacity per drawer: 50 kg
- Colour: HAZET blue
- Made in Germany
- Dimensions: 959 mm x 518 mm x 1020 mm
- Net weight: 110.2 kg
- Drawers, flat: 7 x 81 x 696 x 398 mm
- Drawers, high: 1 x 166 x 696 x 398 mm
- (Drawer) size for plastic drawer insert: 4/3+
- Worktop: Stainless steel
- Number of fixed castors: 2 (Ø 125 mm)
- Number of swivel castors: 2 (Ø 125 mm)
- Number of tools: 515

Order Number

179 N XL-8 S 1/515



179 N XL-8 S 1



163-644/266



1058-2 • •

811 BHK •



850 •

Product data sheet

179 N XL-8 S 1/515

EAN-No. 4000896275915



4766 • ● • 10 3/8
14



163-648/38



612N • ●
10 x 11



612N • ●
11



730
730-3 • 730-7



740-3



746-2



748LGB
748LGB-3 • 748LGB-4



751HS/5



751KHS-3



751KHS-4

811SPH • ●
PH3



824 • —
0.5 x 23



8801K • ○ • 10 3/8
7

986L • ○ • 12 1/2
11 • 7 • 9



1953N-40



1976-11



1977N-2/4



2140N-50



2142N-2



2152-610



2584-8 • ○ • 10 3/8
8



2784 • ○ • 10 3/8
7



2784 • ○ • 10 3/8
6



2901G • ○ • 10 3/8
7



4684-2A



4968-2




4968-3



4968-6



163-650/60
● • 6.3 1/4, 8 1/4



866-10
866-4 • ● • 6.3 1/4

866BH-14 • ● 3 1/4



900SZ6 • ● • 12 1/2, ●
24 • 30 • 32 • 36



1000S-Z • 20 3/4
1000S-G1736 • 1000S-
H1736



1003S-07K • 12 1/2 • ●



1003S-2 • ○ • 20 3/4



1845A-19



1845B-19



1845C-19



1845D-19



1965-22A



1975



1979-11



2116LG/8H • ●



2154N-3



2157



2157-04



2206 • ○ • 8 1/4
5 • 6 • 8 • 10



2210 • ● • 8 1/4
0.8 x 5.5 • 1 x 5.5 •
1.2 x 6.5 • 1.6 x 8 • 2 x 12



2217 • ● • 8 1/4
PH2 • PH3 • PH4



2224 • ● • 8 1/4
T30 • T40 • T45 • T50



2272 • 8 1/4



4850-1



9040-4/6