STAHLWILLE®



Pullers, three-armed

11351

Product no.	**71035101**
GTIN	**4018754342051**
Model	**11351/1**

Label. Puller Clamping w.160mm x Clamping d.130mm

Properties.

- three-armed
- with self-centring puller arms
- for gears, ball bearings, pulleys and similar parts from a shaft or axle
- double-sided use of the extractor hooks: narrow arm end (20 mm) for narrow installation spaces, wide arm end (24 mm) with slot (8 mm) for pulling off washers or gear wheels with the aid of 8 mm screws
- nitrided spindle, no lubrication required, maintenance-free
- zinc plated

Benefits.

For quick and reliable removal of gears, ball bearings, pulleys and for extracting the outer rings of ball bearings and bushings from drilled holes.


Automatic pressure of the arms under load makes application easier.

The nitrided surface of the spindle allows it to move easily so it does not require additional lubrication.

The arm ends have a narrow and wide design and can therefore be used on both sides.

Outstanding flexural strength thanks to legs with precisley manufactured profiles and smooth, milled guides.

Product highlights.



Reliable sliding properties.
The high-quality tempered and specially coated pressure spindle has particularly good sliding properties in the thread, is maintenance-free and does not require oiling.



Adapted access geometry.
Heavy-duty puller hooks made of oil-hardened Chrome Alloy Steel with special access geometry for tight spaces. Custom radii for shafts and axes.




Protection against damage.
The centering tip is freely rotating - to protect the shafts from damage.

PRODUCT IMAGE IN PROGRESS

Flexible puller hooks.
The two-sided puller hooks can be used flexibly because they have different designs at both ends. The narrow side (20 mm) is perfect for tight spaces, while the wide side (24 mm) has an 8 mm slot that allows effortless removal of washers or gears with 8 mm screws.

Technical drawing.

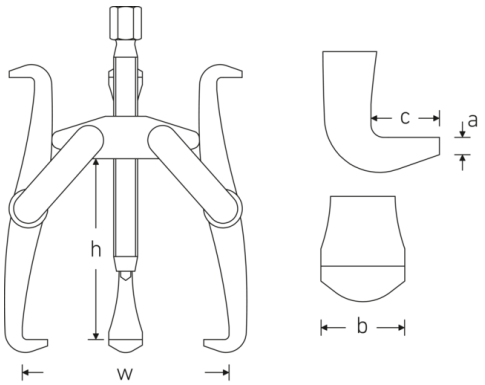

Technical attributes.

Size	1
External hex drive (mm)	19 mm
Number of hooks	3
max. load	7,5 t
Clamping depth (h) mm	130 mm
Span mm (w)	160 mm
Spindle thread size	M18 x 1,5 x 170
Hook base width mm (b)	24 mm
Hook foot depth mm (c)	12 mm
Thickness of hook base tip mm (a)	3 mm

Logistics data.

Product no.	71035101
GTIN	4018754342051
Weight (g)	2600 g
Volume (packaged, dm3)	6.024375 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82055980
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	215
Width mm (IFS)	160
Height mm (IFS)	140
Weight (gross, kg)	2,574
Weight PAP (kg)	0,178
Weight PVC (kg)	0,000
Length (packaged, mm)	225
Width (packaged, mm)	175
Height (packaging, mm)	153

GTIN.

4 018754 342051

Spare part(s), spare part(s) for.

PRODUCT IMAGE IN PROGRESS

79281006
Puller spindle

Images.



STAHLWILLE Eduard Wille GmbH
Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0
info@stahlwille.de · www.stahlwille.com
© STAHLWILLE Eduard Wille GmbH, Wuppertal