



MOMENTUM torque wrench

43050



Product no. **56043050**
GTIN **4022668014478**
Model **56043050 MOMENTUM**
6-50Nm

Label. MOMENTUM torque wrench 6-50N·m 3/8"

Properties.

- clicking type with dual stop signal
- no reset to '0' required
- the measuring element is only loaded during the tightening process
- quick adjustment
- dual scale N·m/ft·lb
- clicking mechanism insensitive to further and counter loads (max. up to the measuring range limit of the torque wrench)
- **accuracy +/- 4 %**

Benefits.

Robust, low-maintenance mechanical torque wrench for controlled tightening in the medium torque range.

The quick adjustment of the torque wrench saves time and contributes to the user-friendliness of the MOMENTUM.

The clicking mechanism is insensitive to further and counter loads.

The cycle is indicated by a clear tactile and acoustic click signal.

Thanks to a durable, low-wear trigger system with a bending beam, resetting to "0" is not necessary.

Product highlights.



PRODUCT IMAGE
IN PROGRESS

Clicking dual stop signal.

When the target torque is reached, MANOSKOP® 730N provides a noticeable tactile dual stop signal.




PRODUCT IMAGE
IN PROGRESS

Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



Technologies and features.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.

Technical drawing.

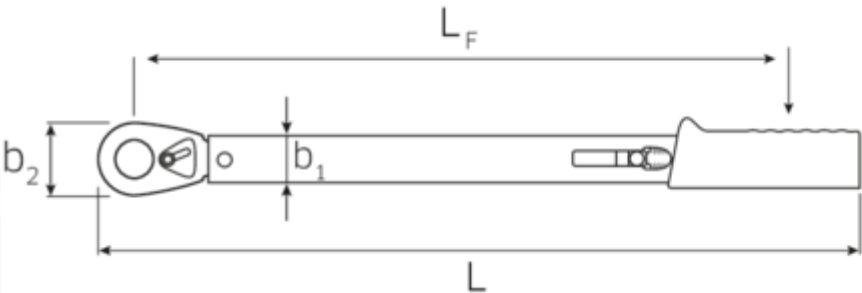

Technical attributes.

Size

5

Logistics data.

Product no.

56043050

Anzeigeabweichung	± 4 %	GTIN	4022668014478
Measuring range N·m	6-50 N·m	Weight (g)	900 g
Measuring range ft·lb	5-36 ft·lb	Volume (packaged, dm3)	0.975375 dm3
MA N·m	6 N·m	Packing standard	1
Nominal value N·m	50 N·m	WEEE/ElektroG	nicht ear-pflichtig
Scale division N·m	2 N·m	Customs tariff no.	82041100
External square drive (inch)	3/8	Country of origin AWR	GERMANY
Length mm (L)	375 mm	Region of origin	Nordrhein-Westfalen
b1	28 mm	Depth mm (IFS)	375
Height mm (h1)	23 mm	Width mm (IFS)	51
LF	293 mm	Height mm (IFS)	51
		Weight (gross, kg)	0,960
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,000
		Length (packaged, mm)	375
		Width (packaged, mm)	51
		Height (packaging, mm)	51

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Tel.: +49 202 4791-0

info@alarm-werkzeug.de · www.alarm-werkzeuge.de

© STAHLWILLE Eduard Wille GmbH, Wuppertal