STAHLWILLE®

Torque wrenches Service MANOSKOP® (in·lb)

730a Quick

Product no.	**50584004**
GTIN	**4018754292691**
Model	**730A/4 QUICK**

Label.

Torque wrench Service MANOSKOP® (in·lb) 730a Quick 70-350in lb 9 x 12 mm L. 223mm

Properties.

- clicking type with dual stop signal
- no reset to "0" required
- the measuring element is only under load when a force is applied
- with holder for interchangeable insert tools
- counter-clockwise tightening by turning the insert tool over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

Product highlights.

Rapid adjustment.
Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.

Adjustment does not require disassembly.
Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



Low-wear bending beam system
Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.

2-component handle
Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.

DIN EN ISO 6789-2
Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

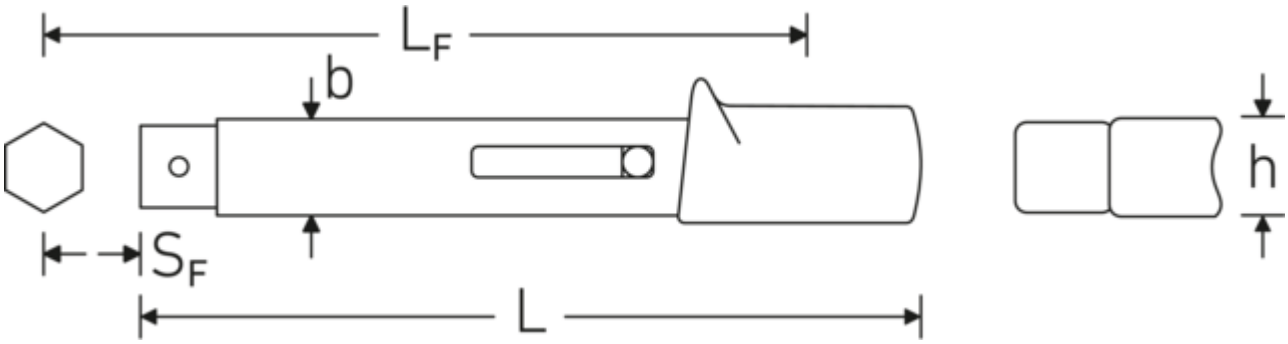

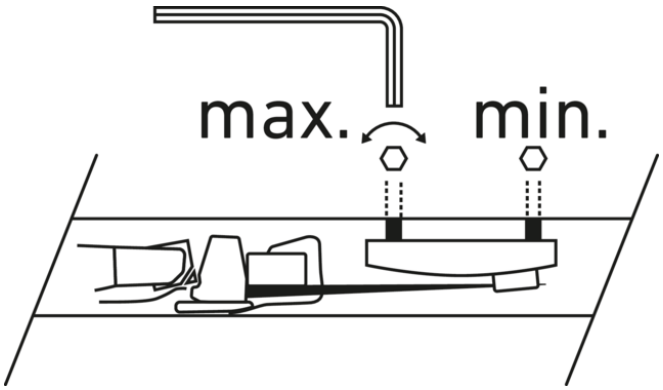

Technical attributes.

Size	a/4
Anzeigeabweichung	± 4 %
Tool holder size [internal square]	9 x 12 mm
Measuring range in-lb	70-350 in·lb
Scale division in-lb	10 in·lb
Length mm (L)	223 mm
Width mm (b)	27,5 mm
Height mm (h)	23,6 mm
LF	200,8 mm
SF	17,5 mm

Logistics data.

Product no.	50584004
GTIN	4018754292691
Weight (g)	395 g
Volume (packaged, dm3)	0.771375 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	225
Width mm (IFS)	43
Height mm (IFS)	30
Weight (gross, kg)	0,478
Weight PAP (kg)	0,000
Weight PVC (kg)	0,066
Length (packaged, mm)	255
Width (packaged, mm)	55
Height (packaging, mm)	55

GTIN.

4 018754 292691

STAHLWILLE Eduard Wille GmbH
Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0
info@stahlwille.de · www.stahlwille.com
© STAHLWILLE Eduard Wille GmbH, Wuppertal