STAHLWILLE®

Torque wrenches Service MANOSKOP®

730R Quick



Product no.	**96504040**
GTIN	**4018754269525**
Model	**730R/40 QUICK**

Label.


Torque wrench Service MANOSKOP® 730R Quick 80-400N·m 3/4" L. 675mm

Properties.

- clicking type with dual stop signal
- no reset to “0’ required, as the measuring element is only under load when a force is applied
- mount for interchangeable insert tools
- with QuickRelease safety lock
- Quick adjustment thanks to easy-to-operate locking lever in handle
- non-slip adjuster with thumb recess for quick torque adjustment
- double scale N·m/ft·lb or N·m/in·lb
- also available on request as a N·m only version without dual scale
- counter-clockwise tightening by turning the insert tools over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**





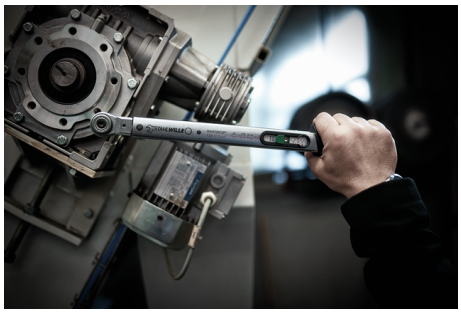

Product highlights.



Rapid adjustment.
Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.




Adjustment does not require disassembly.
Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease
The QuickRelease safety lock prevents unintentional loss of sockets and insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.




Low-wear bending beam system
Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.



2-component handle
Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.





DIN EN ISO 6789-2
Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.



QuickSelect
Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.

Technical drawing.

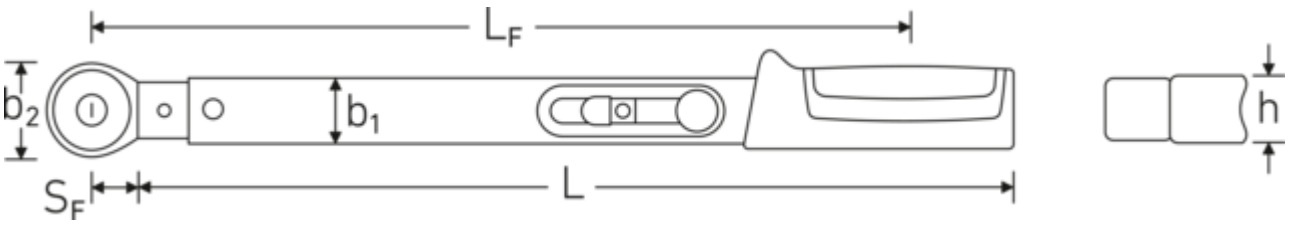

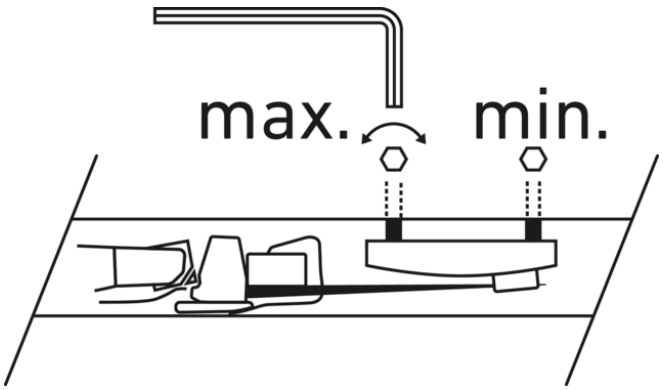

Technical attributes.

Size	40
Anzeigeabweichung	± 4 %
Tool holder size [internal square]	14 x 18 mm
Measuring range N·m	80-400 N·m
Measuring range ft-lb	60-300 ft·lb
MA N·m	80 N·m
Nominal value N·m	400 N·m
Scale division N·m	10 N·m
Scale division ft-lb	10 ft·lb
External square drive (inch)	3/4
Length mm (L)	675 mm
b1	72 mm
b2	50 mm
Height mm (h)	63 mm
DIN	DIN EN ISO 6789-2:2017
LF	570 mm
SF	25 mm

Logistics data.

Product no.	96504040
GTIN	4018754269525
Weight (g)	2694 g
Volume (packaged, dm3)	3.0618 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	675
Width mm (IFS)	72
Height mm (IFS)	63
Weight (gross, kg)	2,694
Weight PAP (kg)	0,185
Weight PVC (kg)	0,000
Length (packaged, mm)	675
Width (packaged, mm)	72
Height (packaging, mm)	63

Parts list.



50184040
MANOSKOP® torque wrench



58250065
Fine-tooth ratchet insert tool

GTIN.

4 018754 269525

Images.



STAHLWILLE Eduard Wille GmbH
Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0
info@stahlwille.de · www.stahlwille.com
© STAHLWILLE Eduard Wille GmbH, Wuppertal