



Torque wrench MOMENTUM

43200



Product no. **56043200**
GTIN **4022668014485**
Model **56043200 MOMENTUM**
40-200Nm

Label.

Torque wrench MOMENTUM 40-200N·m 1/2"

Properties.

- The ideal tool for controlled bolt tightening
- The required torque can be set easily and quickly using the built-in switching mechanism inside the torque wrench
- This quick setting saves time and contributes to the user-friendliness of the MOMENTUM torque wrench
- In addition, the built-in technology makes resetting to "0" superfluous and enables uninterrupted consecutive tightening with the same torque.
- The torque wrench is of the "clicking" type and gives an acoustic as well as a perceptible tactile stop signal when the set torque is reached.
- Applying force beyond the set torque or against the set direction of operation do not affect the tripping mechanism, so it is protected against damage.
- The robust tubular steel housing provides stability and protects the installed technology
- Display deviation is +/- 4% and the twin scale shows Nm and ft.lb.
- A quick reference guide and the factory calibration certificate are included in the scope of delivery.

Benefits.

True craftsmanship leaves nothing to chance - the perfect symbiosis of professional skills and excellent tools unleashes inspiring results. ALARM has been committed to this principle since 1867.

Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



DIN EN ISO 6789-2



Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.

Technical drawing.

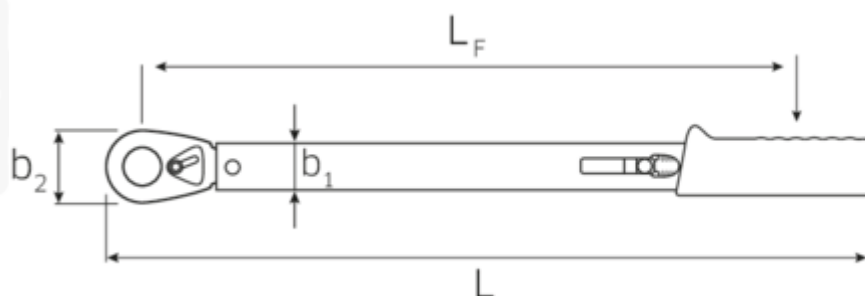

Technical attributes.

Size	20
Anzeigeabweichung	± 4 %
Measuring range N·m	40-200 N·m
Measuring range ft·lb	30-150 ft·lb
MA N·m	40 N·m
Nominal value N·m	200 N·m
Scale division N·m	5 N·m
External square drive (inch)	1/2
Length mm (L)	485 mm
b1	28 mm
b2	41 mm
Height mm (h1)	23 mm
Height mm (h2)	18 mm
LF	418 mm

Logistics data.

Product no.	56043200
GTIN	4022668014485
Weight (g)	1490 g
Volume (packaged, dm3)	1.17504 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	485
Width mm (IFS)	40
Height mm (IFS)	40
Weight (gross, kg)	1,448
Weight PAP (kg)	0,000
Weight PVC (kg)	0,116
Length (packaged, mm)	510
Width (packaged, mm)	48
Height (packaging, mm)	48

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Tel.: +49 202 4791-0

info@alarm-werkzeug.de · www.alarm-werkzeuge.de

© STAHLWILLE Eduard Wille GmbH, Wuppertal